


# miniVNA Tiny - 200402\_232015

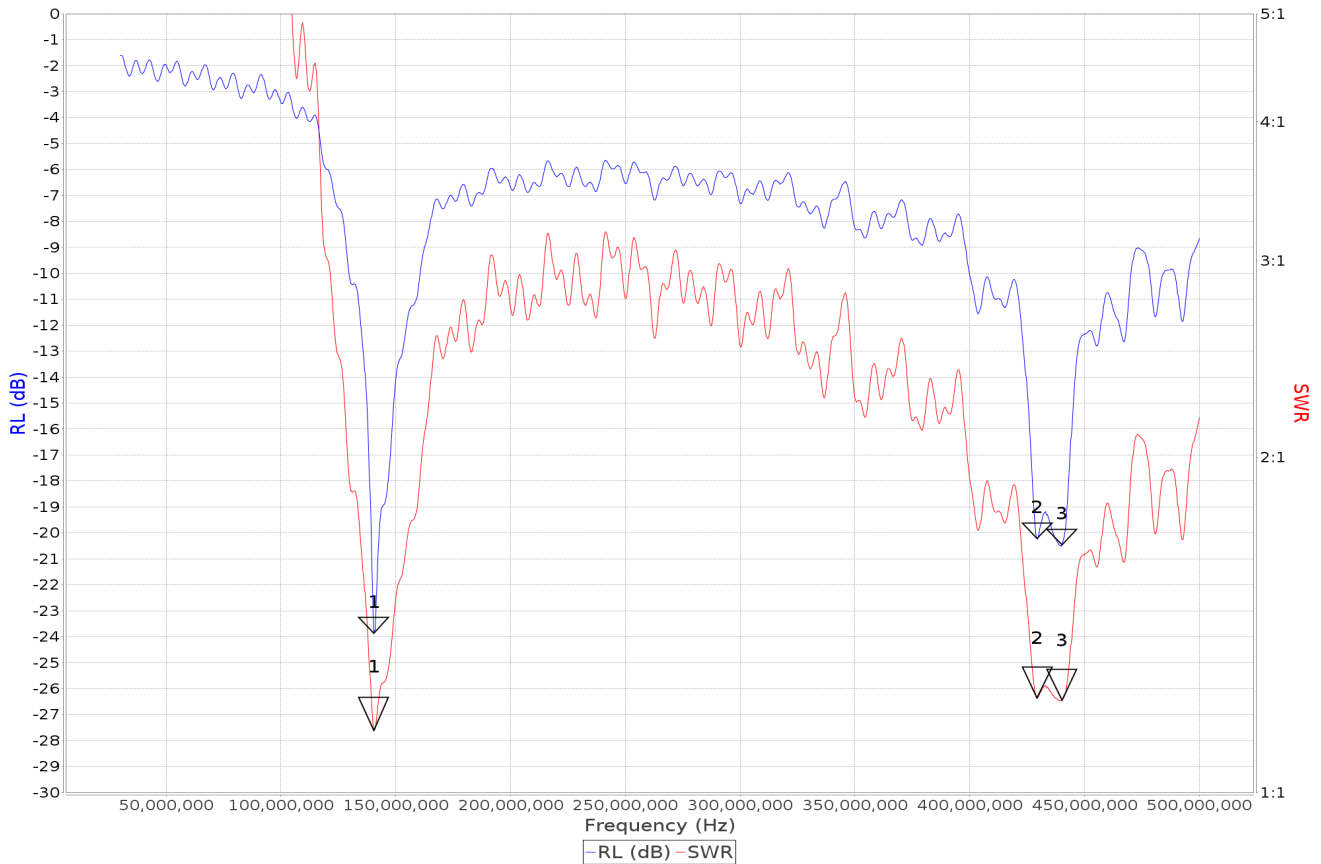

Marker	Freq. (Hz)	RL (dB)	RP (°)	Z  (Ω)	Rs (Ω)	Xs (Ω)	Theta	SWR
1	140,358,001	-23.86	-38.92	55.2	55.1	-4.5	-4.6	1.14:1
2	429,333,584	-20.21	127.13	44.5	43.9	6.9	8.9	1.22:1
1-2	288,975,583	3.65	166.05	10.8	11.1	11.4	0.0	---
3	440,158,892	-20.46	-122.76	45.1	44.6	-7.2	-9.1	1.21:1

## Comment:

Date: 4/2/20, 11:20 PM  
 Mode: Reflection  
 Analyser: miniVNA Tiny / mini radio solutions - miniVNA Tiny  
 Scan  
   Start: 30000000 / 30,000,000  
   Stop: 499999204 / 499,999,204  
   Samples: 1564  
   Overscan: ?  
 Calibration  
   Samples: 23000  
   Overscan: 0  
   File: REFL\_miniVNA Tiny\_no\_cable.cal  
 User: nickoe  
 Headline: {2} - {0,date,yyMMdd}\_{0,time,HHmmss}  
 Port extension len: <not set>m

Port extension vf: <not set>